

# SINGLE STAGE DRY VANE ROTARY PUMPS


Our dry vane vacuum pumps are extremely compact and light thanks to the monoblock design, ensuring silent operation and vibration-free assembly. They can be supplied complete with suction filters and exhaust filter. A special vacuum-tight version is available for gas analyzers.

## Applications:

Food industries, chemical, pharmaceutical, packaging & handling plastic, electrical industry, medical & other applications.



VD 16 - 25 - 40

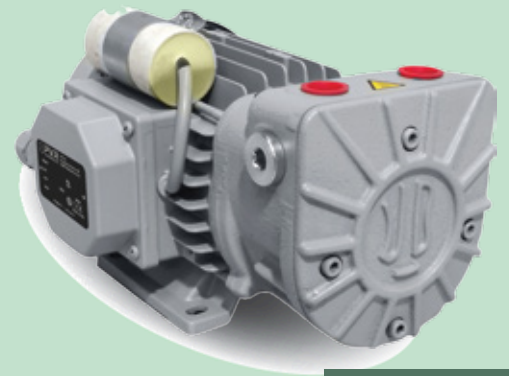

VD 3 - 6 - 8

		VD 3	VD 6	VD 8	VD 16	VD 25	VD 40
Pumping speed*	m <sup>3</sup> /h	3	6	8	16	25	40
Ultimate pressure(abs.)	mbar	≤ 150	≤ 150	≤ 150	≤ 150	≤ 150	≤ 150
Motor power	kW	0.12	0.25	0.25	0.55	0.75	1.25
Motor speed	rpm	3000	3000	3000	1500	1500	1500
Dimensions	L x B x H (mm)	201x108x124	239x158x124	248x158x124	457x238x228	525x256x258	579x256x258
Weight	kg	4.9	7.2	7.7	25	33	36
Connections*	Inlet Outlet	1/8" Gas 1/8" Gas	3/8" Gas 3/8" Gas	3/8" Gas 3/8" Gas	1/2" Gas 1/2" Gas	3/4" Gas 3/4" Gas	3/4" Gas 3/4" Gas

\*@50 Hz

